


JACKCON Electrolytic Capacitors

VARISTOR 7V 突波吸收器

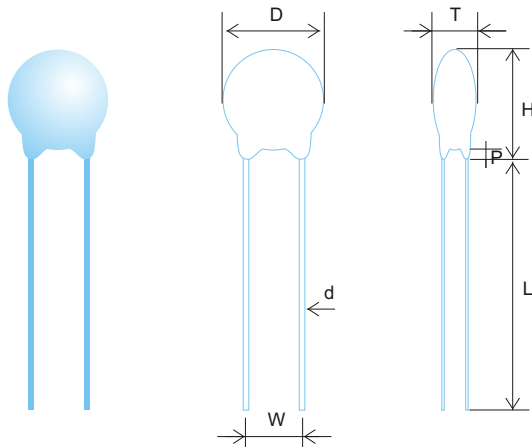

Dimension	Unit : mm
D max	9.0
H max	12.0
W max (±1.0)	5.0
L min	25.0
P max	3.0
d (± 0.02)	0.6

Device Ratings and Characteristics

Part No											
Device Marking	Maximum Allowable Voltage		Varistor Voltage (@1mA)			Clamping Voltage @ Test Current (8/20 μ s)		Maximum Energy (J)	Maximum Peak Current (8/20 μ s)	Rated Power	Typical Capacitance (@1KHz)
	AC rms (V)	DC (V)	Min	Vb (Vdc)	Max	Vc (V)	Jp (A)	10/1000 μ s	(A)	(W)	(pf)
07V201K	130	175	185	200	225	340	10	17.5	1750	0.25	200
07V221K	140	180	198	220	242	360	10	19.0	1750	0.25	190
07V241K	150	200	216	240	264	395	10	21.0	1750	0.25	170
07V271K	180	230	247	270	303	455	10	24.0	1750	0.25	150
07V301K	195	250	270	300	330	500	10	26.0	1750	0.25	140
07V331K	210	275	297	330	363	540	10	28.0	1750	0.25	130
07V361K	230	300	324	360	396	595	10	32.0	1750	0.25	130
07V391K	250	320	351	390	429	650	10	35.0	1750	0.25	130
07V431K	275	350	387	430	473	710	10	40.0	1750	0.25	120
07V471K	300	385	423	470	517	775	10	42.0	1750	0.25	100
07V511K	320	420	459	510	561	845	10	45.0	1750	0.25	90